



# PHANTOM 3

## Prop Guards Installation Guide

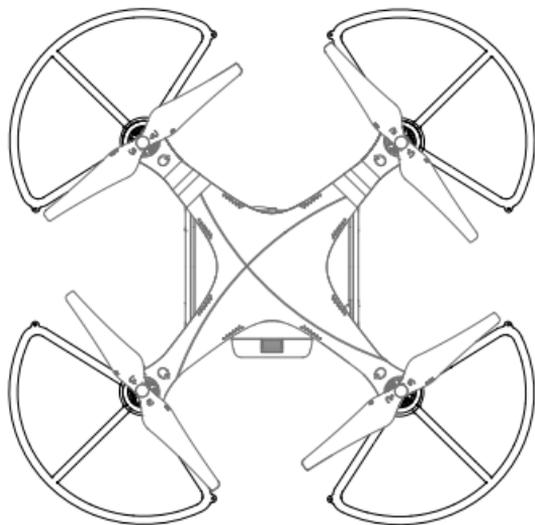

## In the Box

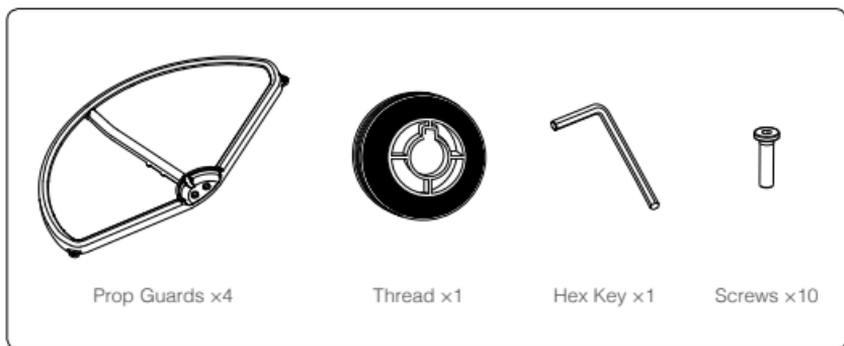

## Specifications


Weight (1pc)	21 g
Angle	155.0°
Radius	131.7 mm
Installed Circumference	612 mm

## Installation

Prepare your Phantom 3, Prop Guards (4pcs), screws (8pcs), thread and hex key.

1

Use the hex key to remove the two outer screws under each of the four motors.

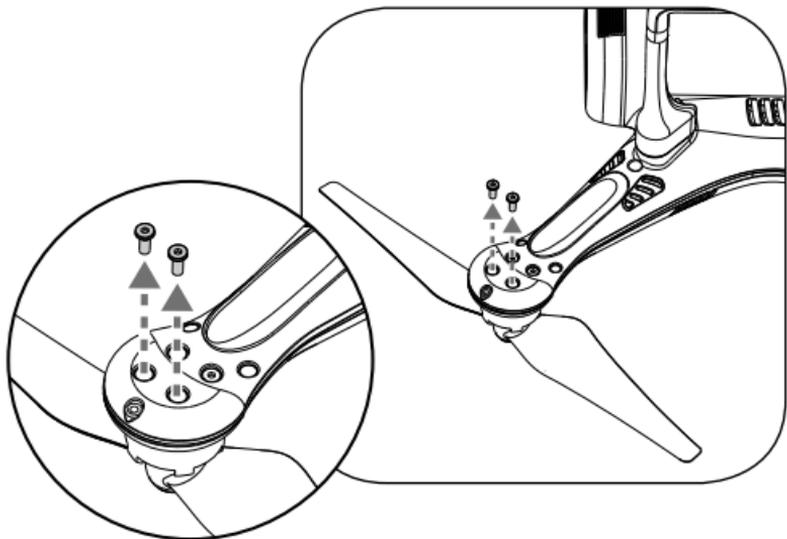


Keep these original screws for when you are not using Prop Guards.

---

2

Mount all four Prop Guards onto the Phantom 3 and tighten the Prop Guard screws. Do not use threadlocker.

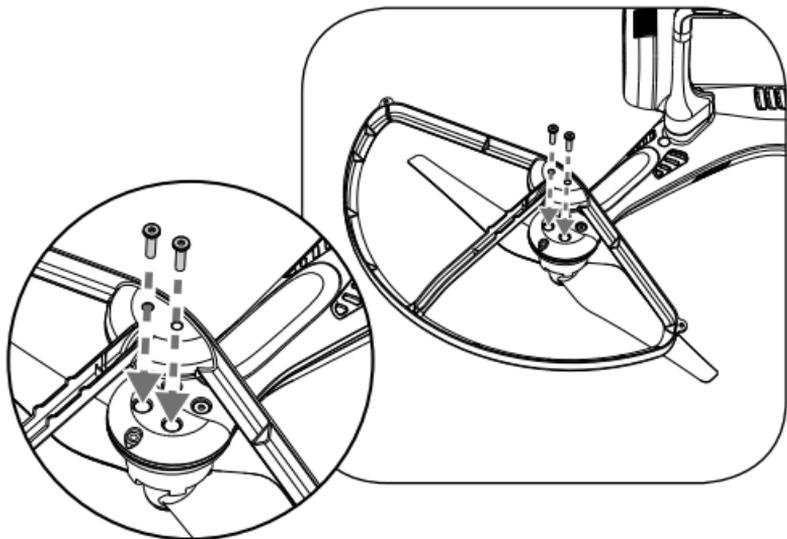


Only use the Prop Guard screws when Prop Guards are mounted to avoid loose joints or damage to the motors.

---

3

For better protection, attach the thread so that it runs through and under the Prop Guards.

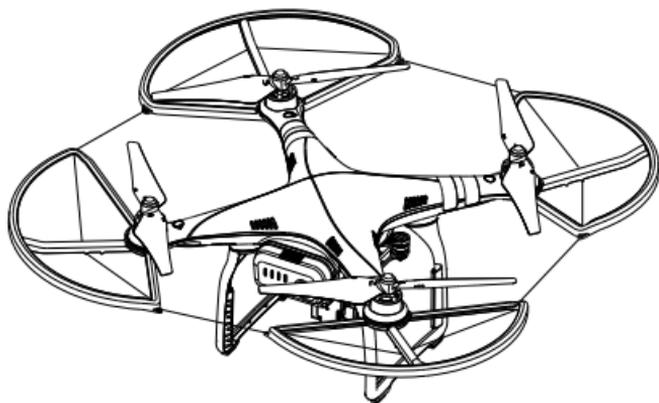

The content is subject to change.

Download the latest version from  
<http://www.dji.com/product/phantom-3>

If you have any questions about this document, please contact DJI by sending a message to [DocSupport@dji.com](mailto:DocSupport@dji.com).

© 2015 DJI. All Rights Reserved.